

Borel

Standard Furnaces & Ovens

since 1918



Photos for illustration purposes only

THERMOCONVECT FURNACES 600°C FT 600

Definition: Air circulating furnace for all applications.

Construction: Robustly built. Stainless steel interior.

Insulation: Multilayer insulation. Interior in ceramic fibre and refractory bricks.

Ventilation: Fan with stainless steel turbine.


Heating: Battery of shielded electrical resistors.

Electricity: 3x400 VAC.

Regulation: Axron Swiss PID temperature controller, over temperature safety.

Documentation: CE marking and operating instructions in English.

Delivered with: 2 shelves.

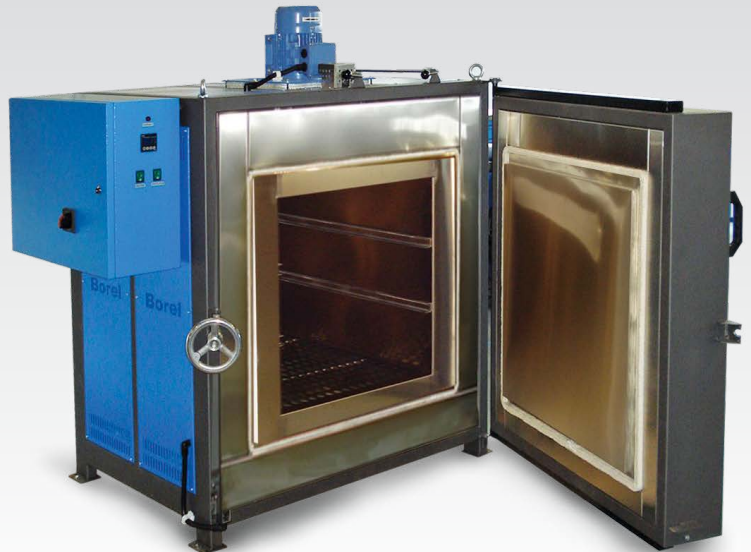

MODEL	ITEM CODE	Int. Vol. (L)	Int. Dim. (WxHxD) (mm)	Ext. Dim. (WxHxD) (mm)	Power (kW)	Weight (kg)
FT 600-30	N15983	30	300 x 250 x 450	1070 x 1150 x 960	6.0	250
FT 600-73	N15984	73	450 x 250 x 650	1150 x 1600 x 1195	8.0	400
FT 600-180	N15985	180	560 x 610 x 560	1300 x 1500 x 1110	10	270
FT 600-290	N15986	290	600 x 600 x 800	1820 x 2200 x 1990	20	630
FT 600-300	N15987	300	750 x 390 x 850	1355 x 1745 x 1400	20	420
FT 600-970	N15988	970	900 x 1200 x 900	1730 x 2300 x 1420	25	900
FT 600-1000	N15995	1000	1000 x 1000 x 1000	1970 x 2560 x 1600	25	800
FT 600-1500	N15996	1500	1000 x 1000 x 1500	1820 x 2240 x 2050	30	1250
FT 600-2250	N15999	2250	1000 x 1500 x 1500	1830 x 2750 x 2100	45	1750

SOLO Swiss SA

Grandes-Vies 25, 2900 Porrentruy, Switzerland - Tel. +41 (0)32 756 64 00 - borel@soloswiss.com - www.borelswiss.com