


# Borel

## Standard Furnaces & Ovens

since 1918

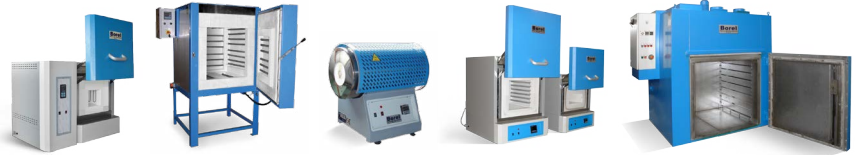

## TOP LOADING FURNACES 1100°C TH 1100

**Definition:** Compact electric chamber furnace for all applications.

**Construction:** Mechanically welded frame.

**Insulation:** Multilayer insulation. Interior in ceramic fibre and refractory bricks.

**Aeration:** Exhaust vent on top.

**Heating:** Coil resistors on ceramic tubes. The heating is turned off at the opening of the door.

**Electricity:** 39 liters, single-phase 230 VAC, 50 Hz. 58 liters 3x400 VAC.

**Regulation:** Axron Swiss PID temperature controller.

**Documentation:** CE marking and operating instructions in English.



Photos for illustration purposes only



MODEL	ITEM CODE	Int. Vol. (L)	Int. Dim. (WxHxD) (mm)	Ext. Dim. (WxHxD) (mm)	Power (kW)	Weight (kg)
TH 1100-40	N16248	39	330 x 330 x 360	630 x 620 x 750	4.1	73
TH 1100-60	N16249	58	330 x 490 x 360	630 x 780 x 750	5.0	88

**SOLO Swiss SA**

Grandes-Vies 25, 2900 Porrentruy, Switzerland - Tel. +41 (0)32 756 64 00 - borel@soloswiss.com - [www.borelswiss.com](http://www.borelswiss.com)

\* V 28.01.2022

Specifications subject to change