


Borel

Standard Furnaces & Ovens

since 1918

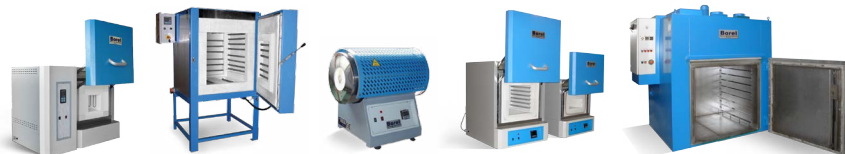

TUBE FURNACES 1400 °C TU 1400

Definition: Tubular electric furnace, for all applications.

Construction: Robust construction made of bent plate.

Insulation: Multilayer insulation. Interior in ceramic fibre and refractory bricks.

Heating: Heating elements in silicon carbide.

Electricity: 3x400 VAC.

Regulation: Axron Swiss PID temperature controller.

Documentation: CE marking and operating instructions in English.



Photos for illustration purposes only



MODEL	ITEM CODE	Heated Length (mm)	Tube Dim. (Øxlength) (mm)	Ext. Dim. (WxHxD) (mm)	Power (kW)	Weight (kg)
TU 1400-20-180	G15040	180	26 x 600	600 x 520 x 350	1.5	19
TU 1400-50-250	N16176	250	50 x 800	665 x 675 x 400	3.0	38
TU 1400-50-450	G15041	450	50 x 1000	850 x 745 x 400	4.0	40
TU 1400-75-450	N16181	450	75 x 1000	850 x 745 x 400	5.5	70
TU 1400-105-450	N16183	450	100 x 1000	850 x 785 x 400	7.0	90
TU 1400-105-610	N16185	610	100 x 1300	1150 x 785 x 400	7.5	95
TU 1400-50-610	N16187	610	50 x 1300	1150 x 745 x 400	4.5	50
TU 1400-75-610	G15042	610	75 x 1300	1150 x 745 x 400	6.5	82

SOLO Swiss SA

Grandes-Vies 25, 2900 Porrentruy, Switzerland - Tel. +41 (0)32 756 64 00 - borel@soloswiss.com - www.borelswiss.com